

High safety and high quality with a large choice of size variation

Models:

XY Series

Flat burner grate type

Top burner (XY · XY Series)

Double ring burner $\phi 180$

● D=600 type
47,600 Btu/h
12,000kcal/h

● D=750 type
59,500 Btu/h
15,000kcal/h

● Stock pot range type
57,100 Btu/h
14,400kcal/h

● Double sided type
46,000 Btu/h
11,600kcal/h
47,600 Btu/h
12,000kcal/h
59,500 Btu/h
15,000kcal/h



Single ring burner $\phi 100$

● D=600 type
15,900 Btu/h
4,000kcal/h

● D=750 type
23,800 Btu/h
6,000kcal/h



Single ring burner $\phi 70$

● 11,900 Btu/h
3,000kcal/h

Burner grate (XY Series)

● Easy to clean with simple shape



Oven (XY · XY Series)

● Improve the strength of the door and sealability by the press working inside the oven door.

● Thermostat : 100°C ~ 320°C

● Oven pilot safety device



XY-1275A

Models:

XYS Series

Stainless top board and round burner grate type

Top board (XYS Series)

- Stainless steel (SUS430 #4 t2.0) top board makes cleaning easy

Burner grate (XYS Series)

- Light and round burner grate
Double ring burner(φ180) φ320
Single ring burner(φ100) φ235
Single ring burner(φ70) φ180

**Gas Valve** (XY·XYS Series)

- Piezo pilot ignition system is adopted for highly safety

Table type (XY·XYS Series)

- Separated shelf board for cleaning and easy to take off

Counter top type (XY·XYS Series)

- H250 counter top type is in the product line



XY-12605T (Counter top type)



XYS-12755T

Accessories for range type

Tray (1 tray is attached per each oven)

	Tray ①	Tray ②
	W430×D340×H40	W548×D398×H40

Shelf net (1 net is attached per each oven)

	Shelf net ①	Shelf net ②	Shelf net ③	Shelf net ④	Shelf net ⑤
	W488×D500	W558×D500	W488×D650	W558×D650	W488×D680

Optional parts

Backguard right angle type (D60×H150)



The backguard is D45mm on the following model
XY-12605A
XY-12605T
XY-18607A
XY-18607T

Only flat type backguard can be attached to the following model
XYS-12605A
XYS-12605T
XYS-18607A
XYS-18607T

Backguard flat type (t1.2×H150)



Safety bar

Prevent careless contact with gas valve



Models:

XY Series product line

Production by order

Gas range · Gas table

Single sided type Depth 600 mm	900	1200				1500		1800
	XY-960 ▶P.7	XY-1260A ▶P.7	XY-12603A ▶P.7	XY-12605A ▶P.7	XY-1560 ▶P.7	XY-15603 ▶P.7	XY-18607A ▶P.7	
Range type	XY-960T ▶P.7	XY-1260T ▶P.7	XY-12603T ▶P.7	XY-12605T ▶P.7	XY-1560T ▶P.7	XY-15603T ▶P.7	XY-18607T ▶P.7	
Table type								
Single sided type Depth 750 mm	900	1200				1500		1800
	XY-975A ▶P.8	XY-1275A ▶P.8	XY-12753A ▶P.8	XY-12755A ▶P.8	XY-1575A ▶P.8	XY-15753A ▶P.8	XY-18757A ▶P.8	
Range type	XY-975T ▶P.8	XY-1275T ▶P.8	XY-12753T ▶P.8	XY-12755T ▶P.8	XY-1575T ▶P.8	XY-15753T ▶P.8	XY-18757T ▶P.8	
Table type								
Double sided type Depth 900 mm	1500	1800						
	XY-1590 ▶P.9	XY-18906 ▶P.9	XY-18908 ▶P.9	XY-18908 ▶P.9	XY-18908 ▶P.9	XY-18126 ▶P.9	XY-18128 ▶P.9	
Range type	XY-1590T ▶P.9	XY-18906T ▶P.9	XY-18908T ▶P.9	XY-18908T ▶P.9	XY-18908T ▶P.9	XY-18126T ▶P.9	XY-18128T ▶P.9	
Table type								
Double sided type Depth 1200 mm						1800		
						XY-18126 ▶P.9	XY-18128 ▶P.9	
Range type						XY-18126T ▶P.9	XY-18128T ▶P.9	
Table type								

Stock pot range

D600 Series Depth 600 mm	600	900	1200	D750 Series Depth 750 mm	600	900	1200
	XY-660L2 ▶P.15	XY-960L2 ▶P.15	XY-1260L2 ▶P.15		XY-675L2 ▶P.15	XY-975L2 ▶P.15	XY-1275L2 ▶P.15

Models:

XYS Series product line

Production by order

Gas range · Gas table

Single sided type Depth 600 mm	900	1200				1500		1800
	YYS-960 ▶P.11	YYS-1260A ▶P.11	YYS-12603A ▶P.11	YYS-12605A ▶P.11	YYS-1560 ▶P.11	YYS-15603 ▶P.11	YYS-18607A ▶P.11	
Range type	YYS-960T ▶P.11	YYS-1260T ▶P.11	YYS-12603T ▶P.11	YYS-12605T ▶P.11	YYS-1560T ▶P.11	YYS-15603T ▶P.11	YYS-18607T ▶P.11	
Table type								
Single sided type Depth 750 mm	900	1200				1500		1800
	YYS-975A ▶P.12	YYS-1275A ▶P.12	YYS-12753A ▶P.12	YYS-12755A ▶P.12	YYS-1575A ▶P.12	YYS-15753A ▶P.12	YYS-18757A ▶P.12	
Range type	YYS-975T ▶P.12	YYS-1275T ▶P.12	YYS-12753T ▶P.12	YYS-12755T ▶P.12	YYS-1575T ▶P.12	YYS-15753T ▶P.12	YYS-18757T ▶P.12	
Table type								
Double sided type Depth 900 mm	1500	1800						
	YYS-1590 ▶P.13	YYS-18906 ▶P.13	YYS-18908 ▶P.13	YYS-18908 ▶P.13	YYS-18908 ▶P.13	YYS-18126 ▶P.13	YYS-18128 ▶P.13	
Range type	YYS-1590T ▶P.13	YYS-18906T ▶P.13	YYS-18908T ▶P.13	YYS-18908T ▶P.13	YYS-18908T ▶P.13	YYS-18126T ▶P.13	YYS-18128T ▶P.13	
Table type								
Double sided type Depth 1200 mm						1800		
						YYS-18126 ▶P.13	YYS-18128 ▶P.13	
Range type						YYS-18126T ▶P.13	YYS-18128T ▶P.13	
Table type								

GAS RANGE

Models:
XY Series

D=600
Gas range · Gas table

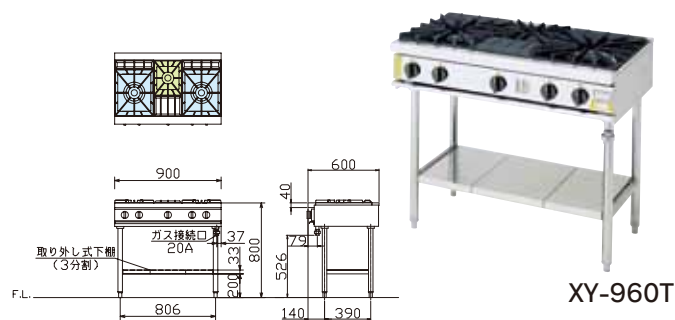
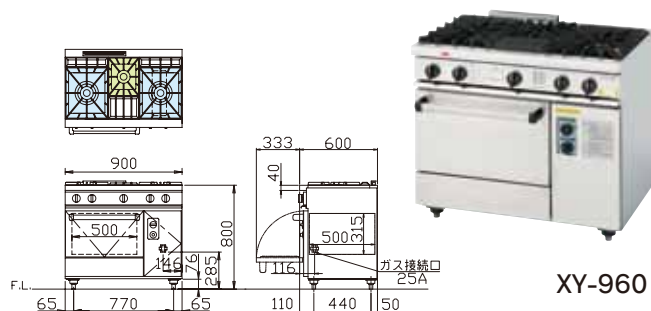
Top burner Piezo pilot ignition /  Double ring burner 47,600 Btu/h 12,000kcal/h ϕ 180  Single ring burner 15,900 Btu/h 4,000kcal/h ϕ 100  Single ring burner 11,900 Btu/h 3,000kcal/h ϕ 70

Oven Pilot safety device · thermostat (100°C ~ 320°C)









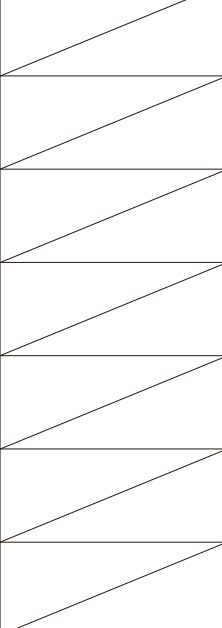





Range type



Table type




※Rack: 2 × 103mm pitch interval

t ype	Model No.	JIA	Top Burner Layout				Number of top burner			※Dim. Baking Chamber (mm)			Oven	Tray Shelf net (P5)	Gas Input		Gas Conn
			900	1200	1500	1800	ϕ 180 Double Ring Burner 47,600 Btu/h 12,000kcal/h	ϕ 100 Single Burner 15,900 Btu/h 4,000kcal/h	ϕ 70 Single Burner 11,900 Btu/h 3,000kcal/h	W	D	H			Natural Gas	LPG	
Range type H=800	XY-960						2	1	—	500	500	315	1	①	40.1kW (136,800 Btu/h) (34,500kcal/h)	40.1kW (136,800 Btu/h) (2.87kg/h)	25A
	XY-1260A						2	2	—	570	500	315	1	②	44.8kW (152,700 Btu/h) (38,500kcal/h)	44.8kW (152,700 Btu/h) (3.20kg/h)	25A
	●XY-12603A						3	—	—	570	500	315	1	②	49.4kW (168,500 Btu/h) (42,500kcal/h)	49.4kW (168,500 Btu/h) (3.54kg/h)	25A
	XY-12605A						3	—	2	570	500	315	1	②	56.4kW (192,300 Btu/h) (48,500kcal/h)	56.4kW (192,300 Btu/h) (4.04kg/h)	25A
	XY-1560						3	2	—	500	500	315	2	①	66.3kW (226,000 Btu/h) (57,000kcal/h)	66.3kW (226,000 Btu/h) (4.74kg/h)	25A
	●XY-15603						3	—	—	500	500	315	2	①	57.0kW (194,300 Btu/h) (49,000kcal/h)	57.0kW (194,300 Btu/h) (4.08kg/h)	25A
	●XY-18607A						4	—	3	570	500	315	2	②	81.6kW (277,600 Btu/h) (70,000kcal/h)	81.6kW (277,600 Btu/h) (5.83kg/h)	25A
Table type H=800	XY-960T						2	1	—						32.6kW (111,000 Btu/h) (28,000kcal/h)	32.6kW (111,000 Btu/h) (2.33kg/h)	20A
	XY-1260T						2	2	—						37.2kW (126,900 Btu/h) (32,000kcal/h)	37.2kW (126,900 Btu/h) (2.66kg/h)	20A
	●XY-12603T						3	—	—						41.9kW (142,800 Btu/h) (36,000kcal/h)	41.9kW (142,800 Btu/h) (3.00kg/h)	20A
	XY-12605T						3	—	2						48.8kW (166,600 Btu/h) (42,000kcal/h)	48.8kW (166,600 Btu/h) (3.50kg/h)	20A
	XY-1560T						3	2	—						51.2kW (174,500 Btu/h) (44,000kcal/h)	51.2kW (174,500 Btu/h) (3.66kg/h)	20A
	●XY-15603T						3	—	—						41.9kW (142,800 Btu/h) (36,000kcal/h)	41.9kW (142,800 Btu/h) (3.00kg/h)	20A
	●XY-18607T						4	—	3						66.5kW (226,000 Btu/h) (57,000kcal/h)	66.5kW (226,000 Btu/h) (4.75kg/h)	20A

Top burner Piezo pilot ignition /  Double ring burner 59,500 Btu/h 15,000kcal/h ϕ 180  Single ring burner 23,800 Btu/h 6,000kcal/h ϕ 100


Oven Pilot safety device · thermostat (100°C ~ 320°C)

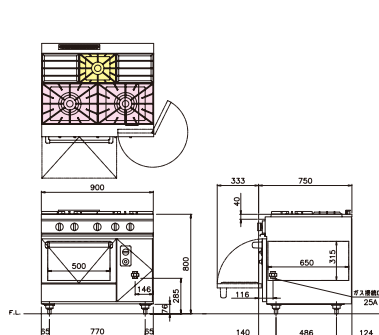Range type



XY-975A

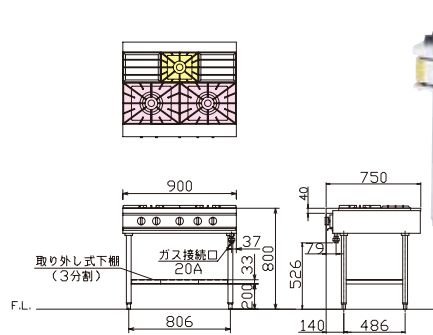Table type



XY-975T

※ Rack: 2×103mm pitch interval

t ype	Model No.	JIA	Top Burner Layout				Number of top burner		Dim. Baking Chamber (mm)			Oven	Tray Shelf net (P5)	Gas Input		Gas Conn
			900	1200	1500	1800	ϕ 180 Double Ring Burner 59,500 Btu/h 15,000kcal/h	ϕ 100 Single Burner 23,800 Btu/h 6,000kcal/h	W	D	H			Natural Gas	LPG	
Range type H=800	XY-975A						2	1	500	650	315	1	③	49.4kW (168,500 Btu/h) (42,500kcal/h)	47.7kW (168,500 Btu/h) (3.41kg/h)	25A
	XY-1275A						2	2	570	650	315	1	④	58.5kW (199,500 Btu/h) (50,300kcal/h)	56.4kW (199,500 Btu/h) (4.03kg/h)	25A
	●XY-12753A						3	—	570	650	315	1	④	62.0kW (211,400 Btu/h) (53,300kcal/h)	60.1kW (211,400 Btu/h) (4.29kg/h)	25A
	XY-12755A						3	2	570	650	315	1	④	75.9kW (259,000 Btu/h) (65,300kcal/h)	73.2kW (259,000 Btu/h) (5.23kg/h)	25A
	XY-1575A						3	2	500	650	315	2	③	81.4kW (277,600 Btu/h) (70,000kcal/h)	78.7kW (277,600 Btu/h) (5.62kg/h)	25A
	●XY-15753A						3	—	500	650	315	2	③	67.4kW (230,000 Btu/h) (58,000kcal/h)	65.5kW (230,000 Btu/h) (4.68kg/h)	25A
	●XY-18757A						4	3	570	650	315	2	④	110kW (375,200 Btu/h) (94,600kcal/h)	106kW (375,200 Btu/h) (7.59kg/h)	25A
Table type H=800	XY-975T						2	1						41.9kW (142,800 Btu/h) (36,000kcal/h)	40.2kW (142,800 Btu/h) (2.87kg/h)	20A
	XY-1275T						2	2						48.8kW (166,600 Btu/h) (42,000kcal/h)	46.8kW (166,600 Btu/h) (3.34kg/h)	20A
	●XY-12753T						3	—						52.3kW (178,500 Btu/h) (45,000kcal/h)	50.4kW (178,500 Btu/h) (3.60kg/h)	20A
	XY-12755T						3	2						66.3kW (226,000 Btu/h) (57,000kcal/h)	63.6kW (226,000 Btu/h) (4.54kg/h)	20A
	XY-1575T						3	2						66.3kW (226,000 Btu/h) (57,000kcal/h)	63.6kW (226,000 Btu/h) (4.54kg/h)	20A
	●XY-15753T						3	—						52.3kW (178,500 Btu/h) (45,000kcal/h)	50.4kW (178,500 Btu/h) (3.60kg/h)	20A
	●XY-18757T						4	3						90.9kW (309,300 Btu/h) (78,000kcal/h)	86.9kW (309,300 Btu/h) (6.21kg/h)	20A

GAS RANGE

Models:
XY Double side type

D=900
D=1200

Gas range · Gas table


Top burner Piezo pilot ignition /  Double ring burner 59,500 Btu/h / 15,000kcal/h ϕ 180  Double ring burner 47,600 Btu/h / 12,000kcal/h ϕ 180  Single ring burner 46,000 Btu/h / 11,600kcal/h ϕ 180

Oven Pilot safety device · thermostat (100°C ~ 320°C), Dim. Baking Chamber: D=900type / 500×780×315 (mm), D=1200type / 500×500×315 (mm)


Range type



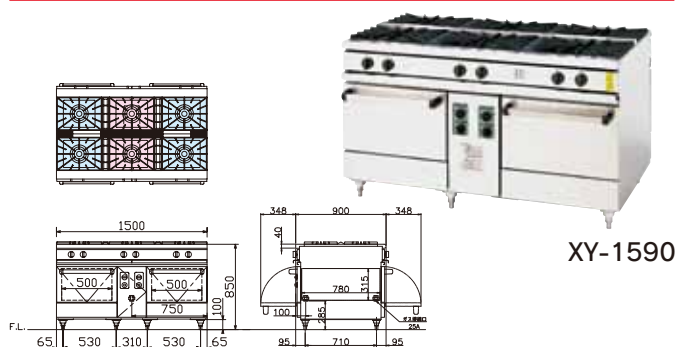Table type



XY-1590

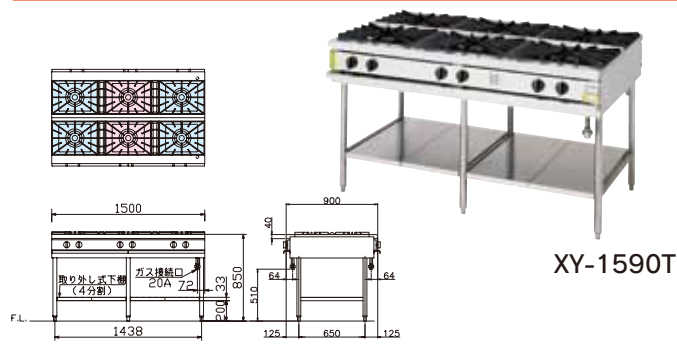

XY-1590T

※Rack: 2×103mm pitch interval

t type	Model No.	Top Burner Layout	Number of top burner			※Dim. Baking Chamber (mm)			Oven	Tray Shelf net (P5)	Gas Input		Gas Conn
			ϕ 180 Double Ring Burner 59,500 Btu/h 15,000kcal/h	ϕ 100 Double Ring Burner 47,600 Btu/h 12,000kcal/h	ϕ 70 Single ring burner 46,000 Btu/h 11,600kcal/h	W	D	H			Natural Gas	LPG	
Range type D=900 H=850	XY-1590		2	4	—	500	780	315	2 (Pass through)	⑤	114kW (388,600 Btu/h) (98,000kcal/h)	113kW (388,600 Btu/h) (8.1kg/h)	25A×2
	XY-18906		6	—	—	500	780	315	2 (Pass through)	⑤	128kW (436,200 Btu/h) (110,000kcal/h)	124kW (436,200 Btu/h) (8.9kg/h)	25A×2
	XY-18908		4	4	—	500	780	315	2 (Pass through)	⑤	149kW (507,600 Btu/h) (128,000kcal/h)	146kW (507,600 Btu/h) (10.5kg/h)	25A×2
	XY-18126		6	—	—	500	500	315	4	①	143kW (488,600 Btu/h) (123,200kcal/h)	139kW (488,600 Btu/h) (10.0kg/h)	25A×2
	XY-18128		4	—	4	500	500	315	4	①	162kW (553,600 Btu/h) (139,600kcal/h)	160kW (553,600 Btu/h) (11.4kg/h)	25A×2
Table type D=900 H=850	XY-1590T		2	4	—	/			/	/	91kW (309,300 Btu/h) (78,000kcal/h)	89kW (309,300 Btu/h) (6.4kg/h)	20A×2
	XY-18906T		6	—	—						105kW (356,900 Btu/h) (90,000kcal/h)	101kW (356,900 Btu/h) (7.2kg/h)	20A×2
	XY-18908T		4	4	—						126kW (428,300 Btu/h) (108,000kcal/h)	123kW (428,300 Btu/h) (8.8kg/h)	20A×2
	XY-18126T		6	—	—						105kW (356,900 Btu/h) (90,000kcal/h)	101kW (356,900 Btu/h) (7.2kg/h)	20A×2
	XY-18128T		4	—	4						124kW (421,900 Btu/h) (106,400kcal/h)	121kW (421,900 Btu/h) (8.7kg/h)	20A×2

Top burner

Piezo pilot ignition



Double ring burner 47,600 Btu/h
12,000kcal/h ϕ 180



Double ring burner 59,500 Btu/h
15,000kcal/h ϕ 180



Single ring burner 15,900 Btu/h
4,000kcal/h ϕ 100




Single ring burner 23,800 Btu/h
6,000kcal/h ϕ 100




Single ring burner 11,900 Btu/h
3,000kcal/h ϕ 70

XY Counter top type



XY-12605T-C

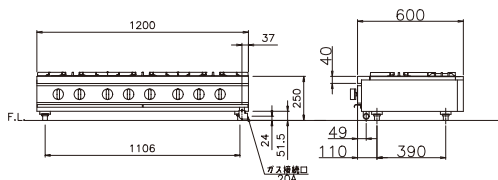

Model No.	JIA	Top Burner Layout				Number of top burner					Gas Input		Gas Conn
		900	1200	1500	1800	ϕ 180 Double Ring Burner 59,500 Btu/h 15,000kcal/h	ϕ 180 Double Ring Burner 47,600 Btu/h 12,000kcal/h	ϕ 100 Single Burner 23,800 Btu/h 6,000kcal/h	ϕ 100 Single Burner 15,900 Btu/h 4,000kcal/h	ϕ 70 Single Burner 11,900 Btu/h 3,000kcal/h	Natural Gas	LPG	
●XY-960T-C (Counter top type)	(13A-LP)					—	2	—	1	—	32.6kW (111,000 Btu/h) (28,000kcal/h)	32.6kW (111,000 Btu/h) (2.33kg/h)	20A
●XY-1260T-C (Counter top type)	(13A-LP)					—	2	—	2	—	37.2kW (126,900 Btu/h) (32,000kcal/h)	37.2kW (126,900 Btu/h) (2.66kg/h)	20A
●XY-12603T-C (Counter top type)	(13A-LP)					—	3	—	—	—	41.9kW (142,800 Btu/h) (36,000kcal/h)	41.9kW (142,800 Btu/h) (3.00kg/h)	20A
●XY-12605T-C (Counter top type)	(13A-LP)					—	3	—	—	2	48.8kW (166,600 Btu/h) (42,000kcal/h)	48.8kW (166,600 Btu/h) (3.50kg/h)	20A
●XY-1560T-C (Counter top type)	(13A-LP)					—	3	—	2	—	51.2kW (174,500 Btu/h) (44,000kcal/h)	51.2kW (174,500 Btu/h) (3.66kg/h)	20A
●XY-15603T-C (Counter top type)	(13A-LP)					—	3	—	—	—	41.9kW (142,800 Btu/h) (36,000kcal/h)	41.9kW (142,800 Btu/h) (3.00kg/h)	20A
●XY-18607T-C (Counter top type)						—	4	—	—	3	66.5kW (226,000 Btu/h) (57,000kcal/h)	66.5kW (226,000 Btu/h) (4.75kg/h)	20A
●XY-975T-C (Counter top type)	(13A-LP)					2	—	1	—	—	41.9kW (142,800 Btu/h) (36,000kcal/h)	40.2kW (142,800 Btu/h) (2.87kg/h)	20A
●XY-1275T-C (Counter top type)	(13A-LP)					2	—	2	—	—	48.8kW (166,600 Btu/h) (42,000kcal/h)	46.8kW (166,600 Btu/h) (3.34kg/h)	20A
●XY-12753T-C (Counter top type)	(13A-LP)					3	—	—	—	—	52.3kW (178,500 Btu/h) (45,000kcal/h)	50.4kW (178,500 Btu/h) (3.60kg/h)	20A
●XY-12755T-C (Counter top type)	(13A-LP)					3	—	2	—	—	66.3kW (226,000 Btu/h) (57,000kcal/h)	63.6kW (226,000 Btu/h) (4.54kg/h)	20A
●XY-1575T-C (Counter top type)	(13A-LP)					3	—	2	—	—	66.3kW (226,000 Btu/h) (57,000kcal/h)	63.6kW (226,000 Btu/h) (4.54kg/h)	20A
●XY-15753T-C (Counter top type)	(13A-LP)					3	—	—	—	—	52.3kW (178,500 Btu/h) (45,000kcal/h)	50.4kW (178,500 Btu/h) (3.60kg/h)	20A
●XY-18757T-C (Counter top type)						4	—	3	—	—	90.9kW (309,300 Btu/h) (78,000kcal/h)	86.9kW (309,300 Btu/h) (6.21kg/h)	20A

GAS RANGE

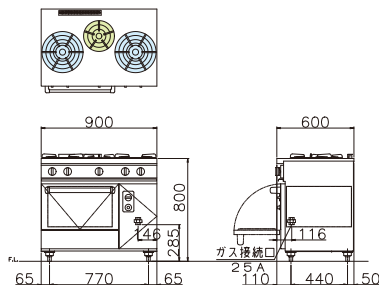
Models:
XYSeries

D=600
Gas range · Gas table

Top burner Piezo pilot ignition / Double ring burner 47,600 Btu/h 12,000kcal/h ϕ 180 Single ring burner 15,900 Btu/h 4,000kcal/h ϕ 100 Single ring burner 11,900 Btu/h 3,000kcal/h ϕ 70


Oven Pilot safety device · thermostat (100°C ~ 320°C)

Range type



XY-960

Table type



XY-960T


※Rack: 2×103mm pitch interval

t ype	Model No.	JIA	Top Burner Layout				Number of top burner			※Dim. Baking Chamber (mm)			Oven	Tray Shelf net (P5)	Gas Input		Gas Conn
			900	1200	1500	1800	ϕ 180 Double Ring Burner 47,600 Btu/h 12,000kcal/h	ϕ 100 Single Burner 15,900 Btu/h 4,000kcal/h	ϕ 70 Single Burner 11,900 Btu/h 3,000kcal/h	W	D	H			Natural Gas	LPG	
Range type H=800	●XY-960	(13A-LP)					2	1	—	500	500	315	1	①	40.1kW (136,800 Btu/h) (34,500kcal/h)	40.1kW (136,800 Btu/h) (2.87kg/h)	25A
	●XY-1260A	(13A-LP)					2	2	—	570	500	315	1	②	44.8kW (152,700 Btu/h) (38,500kcal/h)	44.8kW (152,700 Btu/h) (3.20kg/h)	25A
	●XY-12603A	(13A-LP)					3	—	—	570	500	315	1	②	49.4kW (168,500 Btu/h) (42,500kcal/h)	49.4kW (168,500 Btu/h) (3.54kg/h)	25A
	●XY-12605A	(13A-LP)					3	—	2	570	500	315	1	②	56.4kW (192,300 Btu/h) (48,500kcal/h)	56.4kW (192,300 Btu/h) (4.04kg/h)	25A
	●XY-1560	(13A-LP)					3	2	—	500	500	315	2	①	66.3kW (226,000 Btu/h) (57,000kcal/h)	66.3kW (226,000 Btu/h) (4.74kg/h)	25A
	●XY-15603	(13A-LP)					3	—	—	500	500	315	2	①	57.0kW (194,300 Btu/h) (49,000kcal/h)	57.0kW (194,300 Btu/h) (4.08kg/h)	25A
	●XY-18607A						4	—	3	570	500	315	2	②	81.6kW (277,600 Btu/h) (70,000kcal/h)	81.6kW (277,600 Btu/h) (5.83kg/h)	25A
Table type H=800	●XY-960T	(13A-LP)					2	1	—						32.6kW (111,000 Btu/h) (28,000kcal/h)	32.6kW (111,000 Btu/h) (2.33kg/h)	20A
	●XY-1260T	(13A-LP)					2	2	—						37.2kW (126,900 Btu/h) (32,000kcal/h)	37.2kW (126,900 Btu/h) (2.66kg/h)	20A
	●XY-12603T	(13A-LP)					3	—	—						41.9kW (142,800 Btu/h) (36,000kcal/h)	41.9kW (142,800 Btu/h) (3.00kg/h)	20A
	●XY-12605T	(13A-LP)					3	—	2						48.8kW (166,600 Btu/h) (42,000kcal/h)	48.8kW (166,600 Btu/h) (3.50kg/h)	20A
	●XY-1560T	(13A-LP)					3	2	—						51.2kW (174,500 Btu/h) (44,000kcal/h)	51.2kW (174,500 Btu/h) (3.66kg/h)	20A
	●XY-15603T	(13A-LP)					3	—	—						41.9kW (142,800 Btu/h) (36,000kcal/h)	41.9kW (142,800 Btu/h) (3.00kg/h)	20A
	●XY-18607T						4	—	3						66.5kW (226,000 Btu/h) (57,000kcal/h)	66.5kW (226,000 Btu/h) (4.75kg/h)	20A

Top burner Piezo pilot ignition /  Double ring burner 59,500 Btu/h ϕ 180 15,000kcal/h  Single ring burner 23,800 Btu/h ϕ 100 6,000kcal/h


Oven Pilot safety device · thermostat (100°C ~ 320°C)

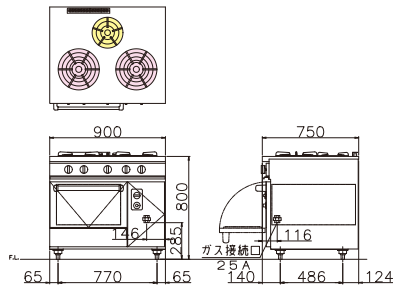Range type

















XYS-975A

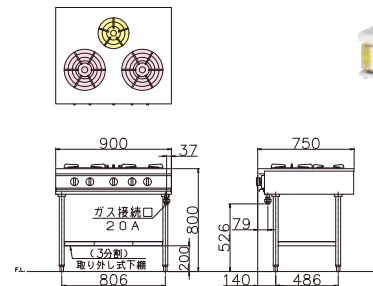Table type



XYS-975T

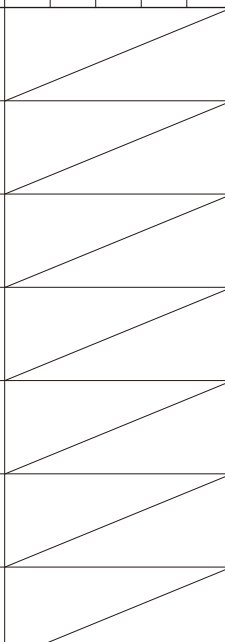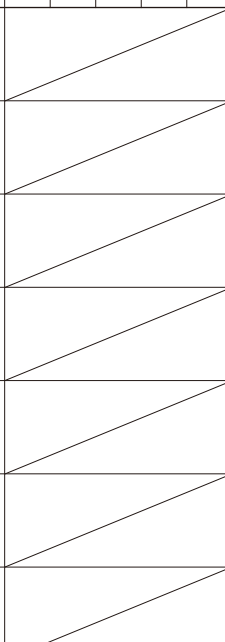t y p e	Model No.	JIA	Top Burner Layout				Number of top burner		※Dim. Baking Chamber (mm)			Oven	Tray Shelf net (▶P5)	Gas Input		Gas Conn
			900	1200	1500	1800	φ180 Double Ring Burner 59,500 Btu/h 15,000kcal/h	φ100 Single Burner 23,800 Btu/h 6,000kcal/h	W	D	H			Natural Gas	LPG	
Range type H=800	●XYS-975A					2	1	500	650	315	1	③ ④	49.4kW (168,500 Btu/h) (42,500kcal/h)	47.7kW (168,500 Btu/h) (3.41kg/h)	25A	
	●XYS-1275A					2	2	570	650	315	1	③ ④	58.5kW (199,500 Btu/h) (50,300kcal/h)	56.4kW (199,500 Btu/h) (4.03kg/h)	25A	
	●XYS-12753A					3	—	570	650	315	1	③ ④	62.0kW (211,400 Btu/h) (53,300kcal/h)	60.1kW (211,400 Btu/h) (4.29kg/h)	25A	
	●XYS-12755A					3	2	570	650	315	1	③ ④	75.9kW (259,000 Btu/h) (65,300kcal/h)	73.2kW (259,000 Btu/h) (5.23kg/h)	25A	
	●XYS-1575A					3	2	500	650	315	2	③ ④	81.4kW (277,600 Btu/h) (70,000kcal/h)	78.7kW (277,600 Btu/h) (5.62kg/h)	25A	
	●XYS-15753A					3	—	500	650	315	2	③ ④	67.4kW (230,000 Btu/h) (58,000kcal/h)	65.5kW (230,000 Btu/h) (4.68kg/h)	25A	
	●XYS-18757A					4	3	570	650	315	2	③ ④	110kW (375,200 Btu/h) (94,600kcal/h)	106kW (375,200 Btu/h) (7.59kg/h)	25A	
Table type H=800	●XYS-975T					2	1						41.9kW (142,800 Btu/h) (36,000kcal/h)	40.2kW (142,800 Btu/h) (2.87kg/h)	20A	
	●XYS-1275T					2	2						48.8kW (166,600 Btu/h) (42,000kcal/h)	46.8kW (166,600 Btu/h) (3.34kg/h)	20A	
	●XYS-12753T					3	—						52.3kW (178,500 Btu/h) (45,000kcal/h)	50.4kW (178,500 Btu/h) (3.60kg/h)	20A	
	●XYS-12755T					3	2						66.3kW (226,000 Btu/h) (57,000kcal/h)	63.6kW (226,000 Btu/h) (4.54kg/h)	20A	
	●XYS-1575T					3	2						66.3kW (226,000 Btu/h) (57,000kcal/h)	63.6kW (226,000 Btu/h) (4.54kg/h)	20A	
	●XYS-15753T					3	—						52.3kW (178,500 Btu/h) (45,000kcal/h)	50.4kW (178,500 Btu/h) (3.60kg/h)	20A	
●XYS-18757T					4	3						90.9kW (309,300 Btu/h) (78,000kcal/h)	86.9kW (309,300 Btu/h) (6.21kg/h)	20A		

GAS RANGE

Models:
XYSDouble side type

D=900
D=1200

Gas range · Gas table

Top burner Piezo pilot ignition /  Double ring burner 59,500 Btu/h 15,000kcal/h ϕ 180  Double ring burner 47,600 Btu/h 12,000kcal/h ϕ 100  Double ring burner 46,000 Btu/h 11,600kcal/h ϕ 70

Oven Pilot safety device · thermostat (100°C~320°C), Dim. Baking Chamber : D=900type / 500×780×315 (mm), D=1200type / 500×500×315 (mm)

Range type


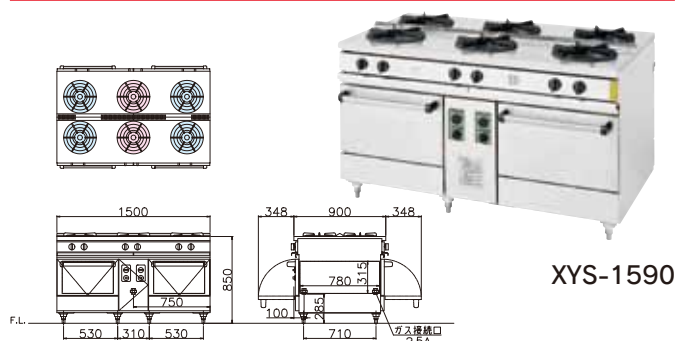


Table type

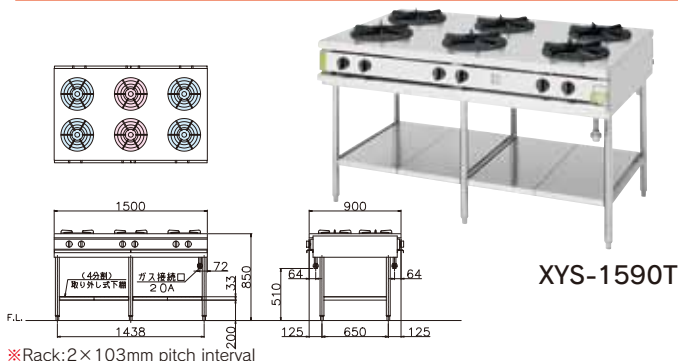

t ype	Model No.	Top Burner Layout	Number of top burner			Dim. Baking Chamber (mm)			Oven	Tray Shelf net (P5)	Gas Input		Gas Conn
			ϕ 180	ϕ 180	ϕ 180	W	D	H			Natural Gas	LPG	
			Double Ring Burner 59,500 Btu/h 15,000kcal/h	Double Ring Burner 47,600 Btu/h 12,000kcal/h	Double Ring Burner 46,000 Btu/h 11,600kcal/h								
Range type	XYSD-1590		2	4	—	500	780	315	2 (Pass through)	(B) (5)	114kW (388,600 Btu/h) (98,000kcal/h)	113kW (388,600 Btu/h) (8.1kg/h)	25A×2
	XYSD-18906		6	—	—	500	780	315	2 (Pass through)	(B) (5)	128kW (436,200 Btu/h) (110,000kcal/h)	124kW (436,200 Btu/h) (8.9kg/h)	25A×2
	XYSD-18908		4	4	—	500	780	315	2 (Pass through)	(B) (5)	149kW (507,600 Btu/h) (128,000kcal/h)	146kW (507,600 Btu/h) (10.5kg/h)	25A×2
	XYSD-18126		6	—	—	500	500	315	4	(A) (1)	143kW (488,600 Btu/h) (123,200kcal/h)	139kW (488,600 Btu/h) (10.0kg/h)	25A×2
	XYSD-18128		4	—	4	500	500	315	4	(A) (1)	162kW (553,600 Btu/h) (139,600kcal/h)	160kW (553,600 Btu/h) (11.4kg/h)	25A×2
Table type	XYSD-1590T		2	4	—	/			/	/	91kW (309,300 Btu/h) (78,000kcal/h)	89kW (309,300 Btu/h) (6.4kg/h)	20A×2
	XYSD-18906T		6	—	—						105kW (356,900 Btu/h) (90,000kcal/h)	101kW (356,900 Btu/h) (7.2kg/h)	20A×2
	XYSD-18908T		4	4	—						126kW (428,300 Btu/h) (108,000kcal/h)	123kW (428,300 Btu/h) (8.8kg/h)	20A×2
	XYSD-18126T		6	—	—						105kW (356,900 Btu/h) (90,000kcal/h)	101kW (356,900 Btu/h) (7.2kg/h)	20A×2
	XYSD-18128T		4	—	4						124kW (421,900 Btu/h) (106,400kcal/h)	121kW (421,900 Btu/h) (8.7kg/h)	20A×2

Top burner

Piezo pilot ignition /



Double ring burner 47,600 Btu/h
12,000kcal/h ϕ 180



Double ring burner 59,500 Btu/h
15,000kcal/h ϕ 180



Single ring burner 15,900 Btu/h
4,000kcal/h ϕ 100




Single ring burner 23,800 Btu/h
6,000kcal/h ϕ 100















Single ring burner 11,900 Btu/h
3,000kcal/h ϕ 70

XYS Counter top type



XYZ-12603T-C

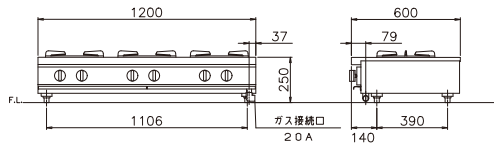

t y p e	Model No.	JIA	Top Burner Layout				Number of top burner					Gas Input		Gas Conn
							φ 180 Double Ring Burner 59,500 Btu/h 15,000kcal/h	φ 180 Double Ring Burner 47,600 Btu/h 12,000kcal/h	φ 100 Single Burner 23,800 Btu/h 6,000kcal/h	φ 100 Single Burner 15,900 Btu/h 4,000kcal/h	φ 70 Single Burner 11,900 Btu/h 3,000kcal/h	Natural Gas	LPG	
			900	1200	1500	1800								
C O U N T E R T O P T Y P E	●XYS-960T-C (Counter top type)	(13A-LP) 					—	2	—	1	—	32.6kW (111,000 Btu/h) (28,000kcal/h)	32.6kW (111,000 Btu/h) (2.33kg/h)	20A
	●XYS-1260T-C (Counter top type)	(13A-LP) 					—	2	—	2	—	37.2kW (126,900 Btu/h) (32,000kcal/h)	37.2kW (126,900 Btu/h) (2.66kg/h)	20A
	●XYS-12603T-C (Counter top type)	(13A-LP) 					—	3	—	—	—	41.9kW (142,800 Btu/h) (36,000kcal/h)	41.9kW (142,800 Btu/h) (3.00kg/h)	20A
	●XYS-12605T-C (Counter top type)	(13A-LP) 					—	3	—	—	2	48.8kW (166,600 Btu/h) (42,000kcal/h)	48.8kW (166,600 Btu/h) (3.50kg/h)	20A
	●XYS-1560T-C (Counter top type)	(13A-LP) 					—	3	—	2	—	51.2kW (174,500 Btu/h) (44,000kcal/h)	51.2kW (174,500 Btu/h) (3.66kg/h)	20A
	●XYS-15603T-C (Counter top type)	(13A-LP) 					—	3	—	—	—	41.9kW (142,800 Btu/h) (36,000kcal/h)	41.9kW (142,800 Btu/h) (3.00kg/h)	20A
	●XYS-18607T-C (Counter top type)	(13A-LP) 					—	4	—	—	3	66.5kW (226,000 Btu/h) (57,000kcal/h)	66.5kW (226,000 Btu/h) (4.75kg/h)	20A
D I S T R I B U T I O N T Y P E	●XYS-975T-C (Counter top type)	(13A-LP) 					2	—	1	—	—	41.9kW (142,800 Btu/h) (36,000kcal/h)	40.2kW (142,800 Btu/h) (2.87kg/h)	20A
	●XYS-1275T-C (Counter top type)	(13A-LP) 					2	—	2	—	—	48.8kW (166,600 Btu/h) (42,000kcal/h)	46.8kW (166,600 Btu/h) (3.34kg/h)	20A
	●XYS-12753T-C (Counter top type)	(13A-LP) 					3	—	—	—	—	52.3kW (178,500 Btu/h) (45,000kcal/h)	50.4kW (178,500 Btu/h) (3.60kg/h)	20A
	●XYS-12755T-C (Counter top type)	(13A-LP) 					3	—	2	—	—	66.3kW (226,000 Btu/h) (57,000kcal/h)	63.6kW (226,000 Btu/h) (4.54kg/h)	20A
	●XYS-1575T-C (Counter top type)	(13A-LP) 					3	—	2	—	—	66.3kW (226,000 Btu/h) (57,000kcal/h)	63.6kW (226,000 Btu/h) (4.54kg/h)	20A
	●XYS-15753T-C (Counter top type)	(13A-LP) 					3	—	—	—	—	52.3kW (178,500 Btu/h) (45,000kcal/h)	50.4kW (178,500 Btu/h) (3.60kg/h)	20A
	●XYS-18757T-C (Counter top type)	(13A-LP) 					4	—	3	—	—	90.9kW (309,300 Btu/h) (78,000kcal/h)	86.9kW (309,300 Btu/h) (6.21kg/h)	20A

STOCK POT RANGE

Models:
XY-L2 Series

D=600
D=750

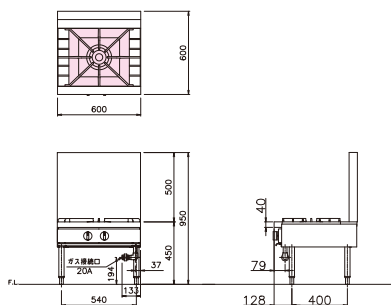
Top burner

Piezo pilot ignition




Double ring burner 57,100 Btu/h
14,400kcal/h $\phi 180$


D=600 type



XY-660L2

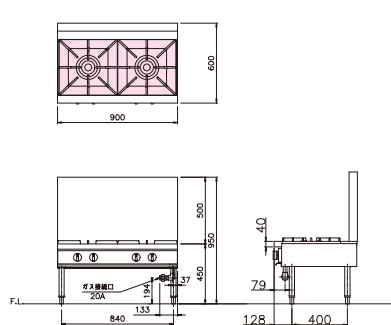


XY-960L2

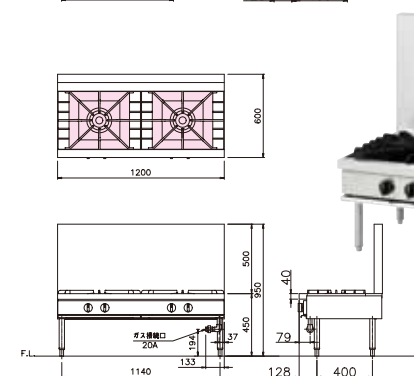


XY-1260L2


D=750 type



XY-675L2

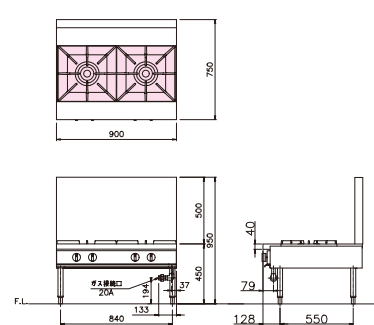

XY-975L2

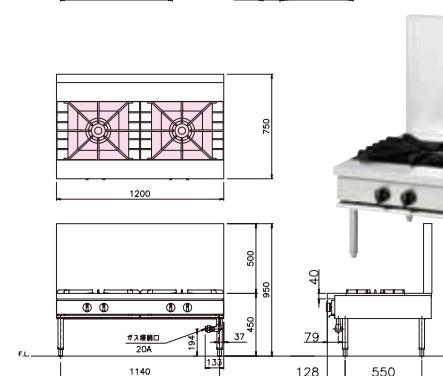

XY-1275L2

t type	Model No.	Top Burner Layout			Number of top burner $\phi 180$ Double Ring Burner 57,100 Btu/h 14,400kcal/h	Gas Input		Gas Conn
		600	900	1200		Natural Gas	LPG	
D=600 H=450	XY-660L2				1	16.8kW (57,100 Btu/h) (14,400kcal/h)	16.8kW (57,100 Btu/h) (1.20kg/h)	20A
	XY-960L2				2	33.6kW (114,200 Btu/h) (28,800kcal/h)	33.6kW (114,200 Btu/h) (2.40kg/h)	20A
	XY-1260L2				2	33.6kW (114,200 Btu/h) (28,800kcal/h)	33.6kW (114,200 Btu/h) (2.40kg/h)	20A
D=750 H=450	XY-675L2				1	16.8kW (57,100 Btu/h) (14,400kcal/h)	16.8kW (57,100 Btu/h) (1.20kg/h)	20A
	XY-975L2				2	33.6kW (114,200 Btu/h) (28,800kcal/h)	33.6kW (114,200 Btu/h) (2.40kg/h)	20A
	XY-1275L2				2	33.6kW (114,200 Btu/h) (28,800kcal/h)	33.6kW (114,200 Btu/h) (2.40kg/h)	20A