COMET

GAS FRYER



CF3-GA18-L16AE

CF3-GA27-L23AE

DESCRIPTION


Analog thermostat adjusts temperature from 90-190degrees. Thermal efficiency is over 60%. Exterior panel is SUS430 stainless steel and oil tank is SUS436L. Hi-limit shut-off device and pilot safety device are equipped. No-oil heating prevention device can avoid damage to an oil tank in case of no-oil heating.

FEATURES

OIL SAVING FRYER

Reduce the capacity of heating zone with changing the tube shape.

The cooking zone, cool zone and cooking capacity is same.



SAFETY DEVICE

No-oil heating prevention device

Operation will stop in about 3 minutes if heating without oil.

*Pilot safety device.

Gas supply will stop if flame goes out

MODELS

☐ CF3-GA18-L16AE 16L

☐ CF3-GA27-L23AE 23L

*High limit shut off device

Gas supply will stop if the temperature rises abnormally.

Oil tank

Tank material is SUS436L with high corrosion resistance and heat resistance.

Small number of tube makes cleaning easy. (16L:2,23L:5)

CONTROL PANEL

Piezo pilot ignition system.

Thermostat adjusts from 90-190degrees.

BACK GUARD (H=250)

High back guard prevents dirt on the wall due to an oil rebound.

Exhaust cover protects burnt on the wall.

DRAIN HANDLE

Big drain handle helps oil draining work safety and easily.

PIPE LEG

Adoption of the pipe leg makes floor cleaning easier and keeps the kitchen hygienic.

The stainless cover is attached to the bottom of the main unit, which prevents contamination inside the main body due to oil bounce and smoke.

COMET KATO MFG.CO.,LTD.


www.cometkato.co.jp


65, Iku, Kabutoshinden, Sobuecho, Inazawa-shi, Aichipref, Japan 495-8517 Telephone 81-587-97-8441 / Fax 81-587-97-8448 / E-mail sales@cometkato.co.jp



ACCESSORIES

- lid
- 0il can (for 25L)
- 0il strainer
- Scoop net
- Bottom net
- Oil drain plate
- Net for oil drain plate

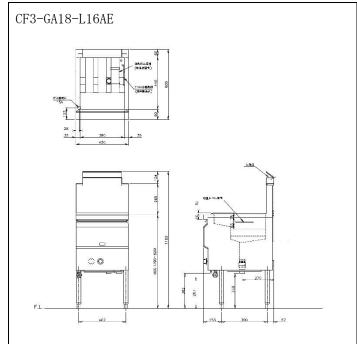

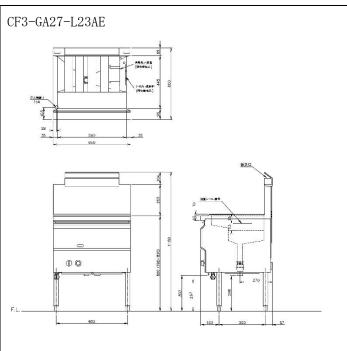

Model	Dimensions(mm)			Gas Input		Gas	Weight	0il
	Width	Depth	Height	Natural Gas	LP Gas	Conn. (mm)	(kg)	Capacity
CF3-GA18-L16AE	450	600	800	9.4kW (32,100Btu/h)	9. 4kW (32, 100Btu/h)	1/2"(13)	54	16L
CF3-GA27-L23AE	650	600	800	13.7kW (46,800Btu/h)	13.7kW (46,800Btu/h)	1/2"(13)	69	23L

The contents of this specification are subject to change without notice.

COMET KATO MFG.CO.,LTD.

www.cometkato.co.jp

65, Iku, Kabutoshinden, Sobuecho, Inazawa-shi, Aichipref, Japan 495-8517